




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|--|
| (51) International Patent Classification ⁷ : B01D 46/14, 45/14, 46/28 | A1 | (11) International Publication Number: WO 00/32297 (43) International Publication Date: 8 June 2000 (08.06.00) |
| (21) International Application Number: PCT/NL98/00679 (22) International Filing Date: 1 December 1998 (01.12.98) (71) Applicant (for all designated States except US): ROWE PARSONS INTERNATIONAL B.V. [NL/NL]; Hoefken 5, NL-4273 XN Hank (NL). (72) Inventor; and (75) Inventor/Applicant (for US only): BOELE, Hendrik, Arie [NL/NL]; Hoefken 5, NL-4273 XN Hank (NL). (74) Agent: HOORWEG, Petrus, Nicolaas; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL). | | (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Dutch).</i> |

(54) Title: SEPARATOR

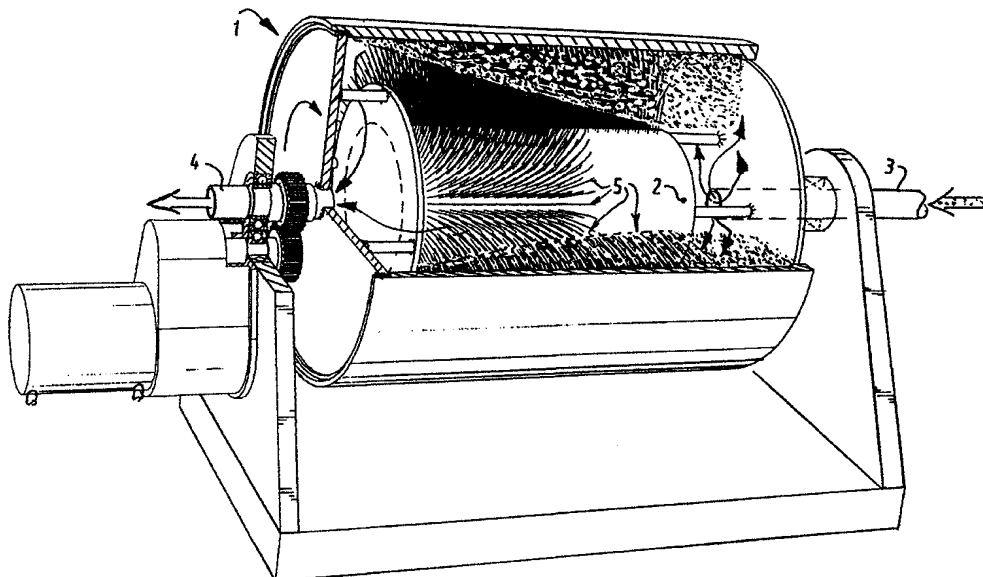

(57) Abstract

A device for separating one or more components from a fluid, such as gas, water, oil and so on, which device is provided with a closed drum-shaped first carrier which is rotatably driven on a shaft and has means for feeding respectively discharging the fluid, wherein a second carrier is arranged coaxially in the first carrier, on which second carrier are arranged a large number of flexible elements which extend radially from the second carrier as far as the first carrier, and the feed means are provided close to the one end of the second carrier and the discharge means close to the other end of the second carrier, so that when the fluid flows through the device a layered separation of the components results along a flexible element.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | NZ | New Zealand | | |
| CM | Cameroon | | Republic of Korea | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakhstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

SEPARATOR

The invention relates to a device for separating one or more components from a fluid, such as gas, water, oil and so on, which device is provided with a closed drum-shaped first carrier which is rotatably driven on a shaft
5 and has means for feeding respectively discharging the fluid.

It is known to separate components from a fluid by causing the fluid to rotate, whereby as a result of the centrifugal force the components are separated in layers
10 around the rotation shaft, whereafter discharge thereof becomes possible and the fluid for axial discharge can for instance be further cleaned.

A drawback of such a system is that a layer does not form in uniform thickness over the periphery, whereby the
15 centre of gravity of the layers does not coincide with the rotation shaft. Severe vibrations are caused as a result during rotation of the fluid.

Another drawback of such a system is that when the drum-shaped first carrier is slowed down only part of the
20 layers in the fluid are slowed down and another part continues to rotate at about the same speed and continues to cause vibrations.

The object of the present invention is to provide a device of the above-described type wherein the above
25 stated drawbacks are obviated.

This object is achieved according to the characterizing measures of claim 1, wherein a second carrier is arranged coaxially in the first carrier, on which second carrier are arranged a large number of
30 elongate elements, preferably flexible, which extend radially or practically radially from the second carrier

as far as the first carrier, wherein the feed means are provided close to the one end of the second carrier and the discharge means close to the other end of the second carrier.

5 The contaminated fluid fed into the rotating device via the feed means will flow transversely of the flexible elements to the discharge means and be subject to centrifugal forces. The flexible elements adapt to the flow forces and the centrifugal forces and cause a
10 substantially laminar flow owing to the obtained form. This laminar flow causes the flow behind the preferably cylindrical flexible element to diminish as seen in the direction of flow. The contaminated particles for separation out of the fluid arrive in this diminished
15 flow and are then substantially subject to the centrifugal forces. Under the influence of these forces and guided by the flexible elements, the particles move towards the rotation shaft or away from the rotation shaft depending on their specific weight relative to the
20 specific weight of the surrounding particles. A separation of the contaminated particles in layers hereby occurs along a flexible element.

An advantage is that the particles separated in layers are held between the large number of flexible
25 elements, whereby the greater part of the contaminants are removed from the fluid flowing to the outside via the discharge means. The outflowing fluid can be separated from even more particles by arranging filters in the discharge means.

30 Another advantage is that due to the laminar flow each deposited layer acquires a uniform thickness over the periphery, whereby little vibration occurs.

Another further advantage is that during the continuous rotation or deceleration or acceleration of
35 the drum the entire fluid with the contaminated particles

is carried along whereby no great speed differences occur between the different layers and flake-like particles are not torn apart.

In a first embodiment a brush-like carrier is
5 arranged in a drum-shaped carrier. By causing these carriers to rotate particles are separated from the contaminated fluid and held between the brush bristles.

In another embodiment the peripheral part of the drum-shaped carrier is releasable and axially
10 displaceable. When the device becomes fouled by the contaminated particles it is herein possible to clean the brush-like carrier and the filter by centrifuging after removing the peripheral part, so that the device can be used again for cleaning fluid. Owing to the adhesive
15 action between the particles and the brush the inner wall of the drum remains virtually clean after axial displacement.

Above mentioned and other features of the invention will be further elucidated in the figure description
20 hereinbelow of a number of embodiments:

fig. 1 shows a perspective view with partly broken-away parts of a first embodiment according to the invention,

fig. 2 shows an axial cross-section of a second
25 embodiment according to the invention,

fig. 3 shows a perspective view with partly broken-away parts of a third embodiment according to the invention,

fig. 4 is a perspective view with partly broken-away
30 parts of the third embodiment according to the invention with released and displaced peripheral part, and

fig. 5 shows a perspective view with partly broken-away parts of a fourth embodiment,

fig. 6 shows an axial cross-section of a fifth
35 embodiment in two positions.

In figure 1 a carrier 2 is fixedly arranged coaxially in a drum 1, on which carrier a large number of flexible elements 5 are provided. These elements 5 extend from carrier 2 up to the inner surface of the drum 1. On the one axial side of drum 1 is provided an inlet 3 and on the other side an outlet 4. The whole device is fixed for axial rotation and is driven by for instance an electric motor.

Fluid, for instance water, having therein particles for removal, for instance sand, is carried into rotating drum 1 via inlet 3. The contaminated fluid is accelerated herein and is subjected to a centrifugal force. The fluid flows in laminar manner transversely of flexible elements 5 and in the diminished flow behind elements 5 the particles are moved by the centrifugal force to drum 1 or carrier 2, depending on the specific weight.

The contaminated particles remain behind between flexible elements 5, while the fluid flows through to outlet 4.

In figure 2 a coaxial carrier 2 is likewise fixedly arranged, but vertically disposed, in a drum 1, on which carrier a large number of flexible elements 5 is provided. Further provided on an axial side and protruding into carrier 2 are a number of filter elements 6 and a feed pipe 3.

In this embodiment contaminated fluid is also carried into the drum via inlet 3 and flows under the influence of centrifugal forces along flexible elements 5, where a large part of the contaminants remain behind.

Only a small part of the contaminants remains behind in the fluid. This then flows to filter elements 6 where particles of determined size are still filtered out of the fluid. The particle size in the effluent can also be determined herewith, which may be important for the further treatment.

Figure 3 shows a third embodiment. Fixedly arranged here in the one drum part 8 is a brush-like body consisting of a carrier 2 on which flexible elements 5 are provided. The diameter of the brush-like body is 5 larger than the inner diameter of the other drum part 7, which is arranged releasably and axially slidable on the one drum part 8. A filter device is further provided coaxially on the discharge side.

The operation of the device for removing 10 contaminated particles from the fluid corresponds with the operation of the second embodiment.

When the device has removed so many particles from the fluid that the space between flexible elements 5 is filled and the filter device is clogged, the device is 15 cleaned as follows.

Fluid is first sucked from drum 7, 8 back into the inlet 3. Drum part 7 is subsequently released and shifted axially by means of for instance a hydraulic cylinder, while the other parts, if desired, rotate slowly relative 20 to drum part 7. The inner surface of drum part 7 is hereby cleaned.

When drum part 7 has been pushed fully clear (see fig. 4), the other components are rotated at high speed, so that all particles are flung out of flexible elements 25 5 and come to lie, optionally via protective hood 10, in receptacle 9. The particles clogging filter 6 are moreover also removed in this manner.

When the device has been cleaned, drum part 7 is pushed back again wherein the other components rotate 30 slowly relative to drum part 7, whereby the contact surface for sealing edge 11 of drum part 7 is additionally cleaned by the flexible elements 5 of the brush-like carrier.

A variant of one of the embodiments has a filter 35 device with radially arranged filter elements, the outer

surface of which is conical (see fig. 5). When the device fills with contaminating particles, a distribution from heavier to lighter particles will result around these filter elements from the rotation shaft to the periphery of the drum. The particles are deposited on the filter elements where particularly the lighter particles can clog the filter element. Because the elements extend radially they will become clogged from the part located furthest away from the rotation shaft towards the rotation shaft. From the moment at which it begins to clog the filter can hereby function longer than conventionally arranged filter elements.

The conical outer surface is particularly suitable with use of the filter elements in an embodiment as according to figures 3 and 4. When the brush-like carrier is cleaned by centrifuging the filter elements with conical outer surface are also properly cleaned. This embodiment combines the advantage of cleaning the device by centrifuging and the advantages of radially arranged filter elements.

Fig. 6 shows a fifth embodiment wherein drum part 7 is shown in a fully opened and a fully closed position. A separate brush 12 is arranged axially on the outside of drum 7, 8. The operation of the embodiment corresponds with the operation of the third embodiment.

When however drum part 7 is axially displaced, the whole inner surface of drum part 7, including the edges, is cleaned by the separate brush. When drum part 7 has returned to its starting position and drum 7, 8 has been brought to speed, the separate brush 12 is cleaned by the centrifugal effect.

CLAIMS

1. Device for separating one or more components from a fluid, such as gas, water, oil and so on, which device is provided with a closed drum-shaped first carrier which is rotatably driven on a shaft and has means for feeding
5 respectively discharging the fluid, **characterized in that** a second carrier is arranged coaxially in the first carrier, on which second carrier are arranged a large number of elongate elements, preferably flexible, which extend radially or practically radially from the second
10 carrier as far as the first carrier, and the feed means are provided close to the one end of the second carrier and the discharge means close to the other end of the second carrier.

2. Device as claimed in claim 1, **characterized in**
15 **that** a filter device is provided in the discharge means.

3. Device as claimed in claim 2, **characterized in that** the filter device comprises one or more filter elements arranged in the first carrier, wherein each filter element has a fluid channel extending between the
20 rotation shaft and the first carrier wall.

4. Device as claimed in claim 3, **characterized in that** the filter element has a conical outer surface.

5. Device as claimed in any of the foregoing claims, **characterized in that** the peripheral part of the first
25 carrier is releasable and axially displaceable.

6. Device as claimed in any of the foregoing claims, **characterized in that** the second carrier with flexible elements is brush-like.

7. Device as claimed in claim 6, **characterized in that** the diameter of the brush-like carrier is larger than the inner diameter of the drum-shaped first carrier.

8. Device as claimed in any of the foregoing claims,
5 **characterized in that** the filter device is wholly or partially situated in the second carrier.

1/6



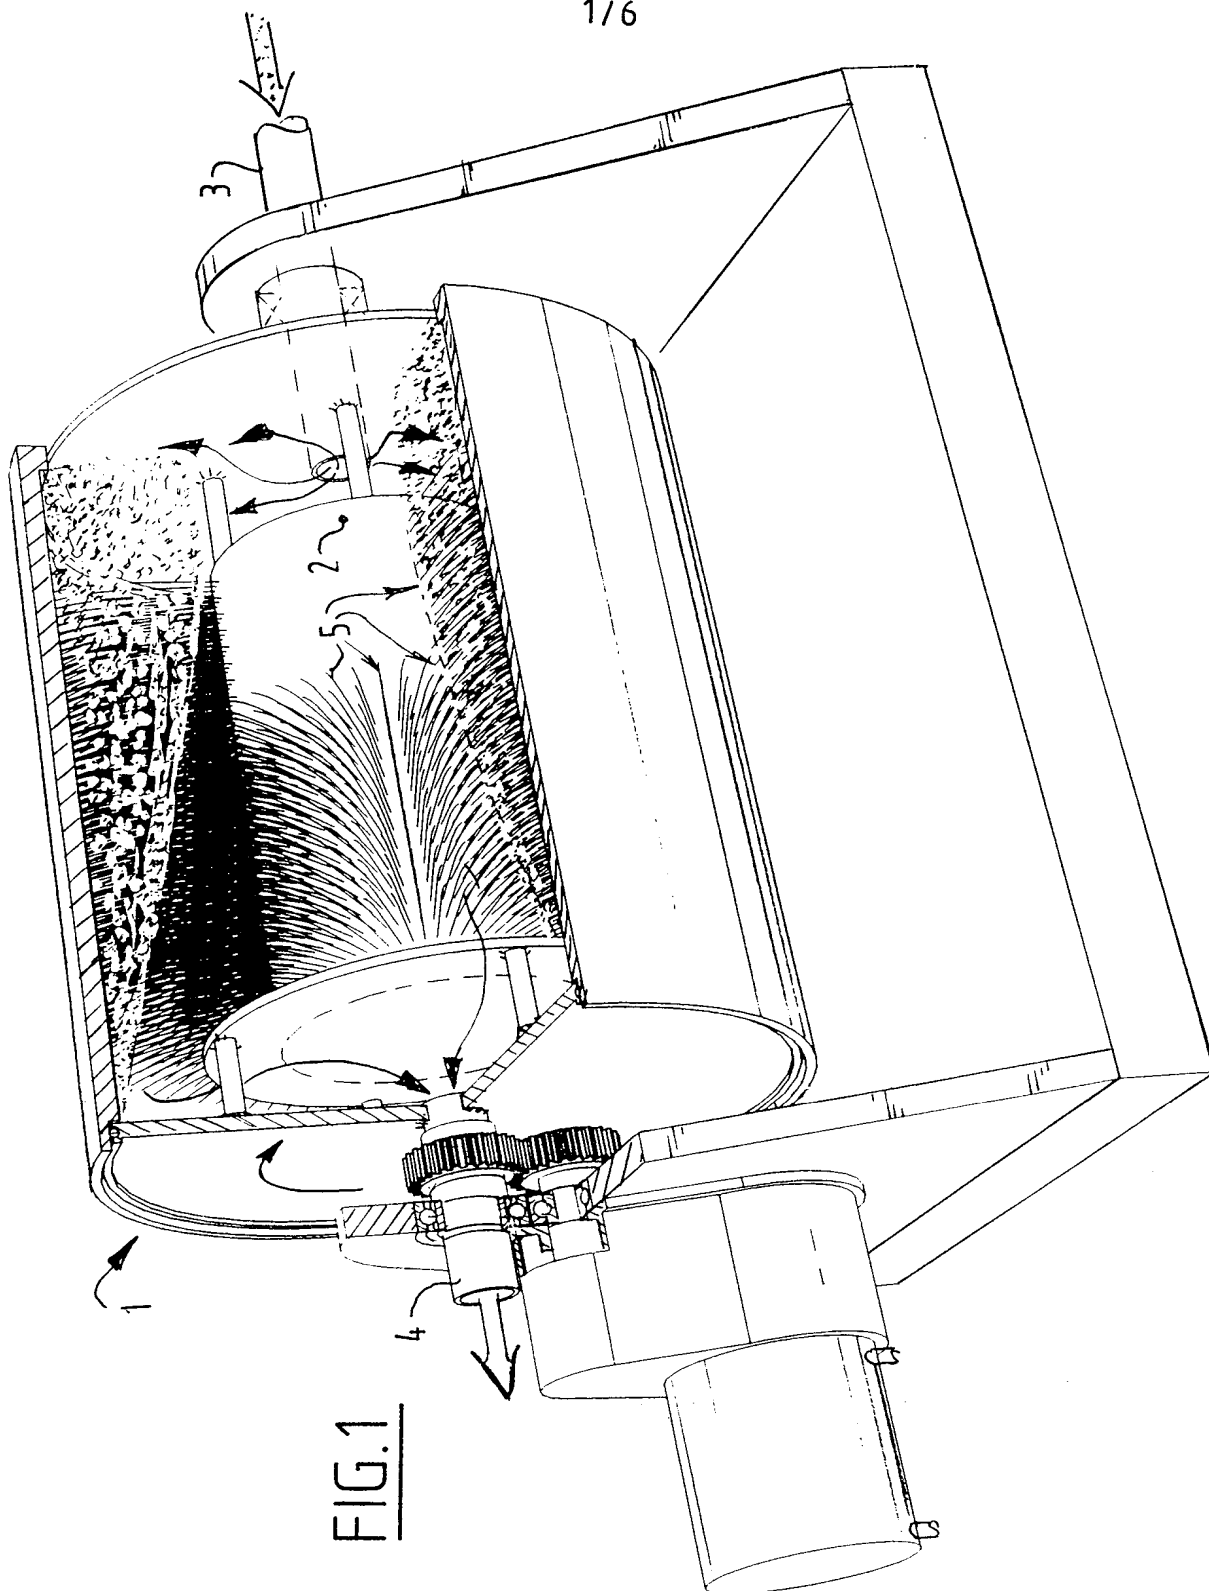


FIG. 2

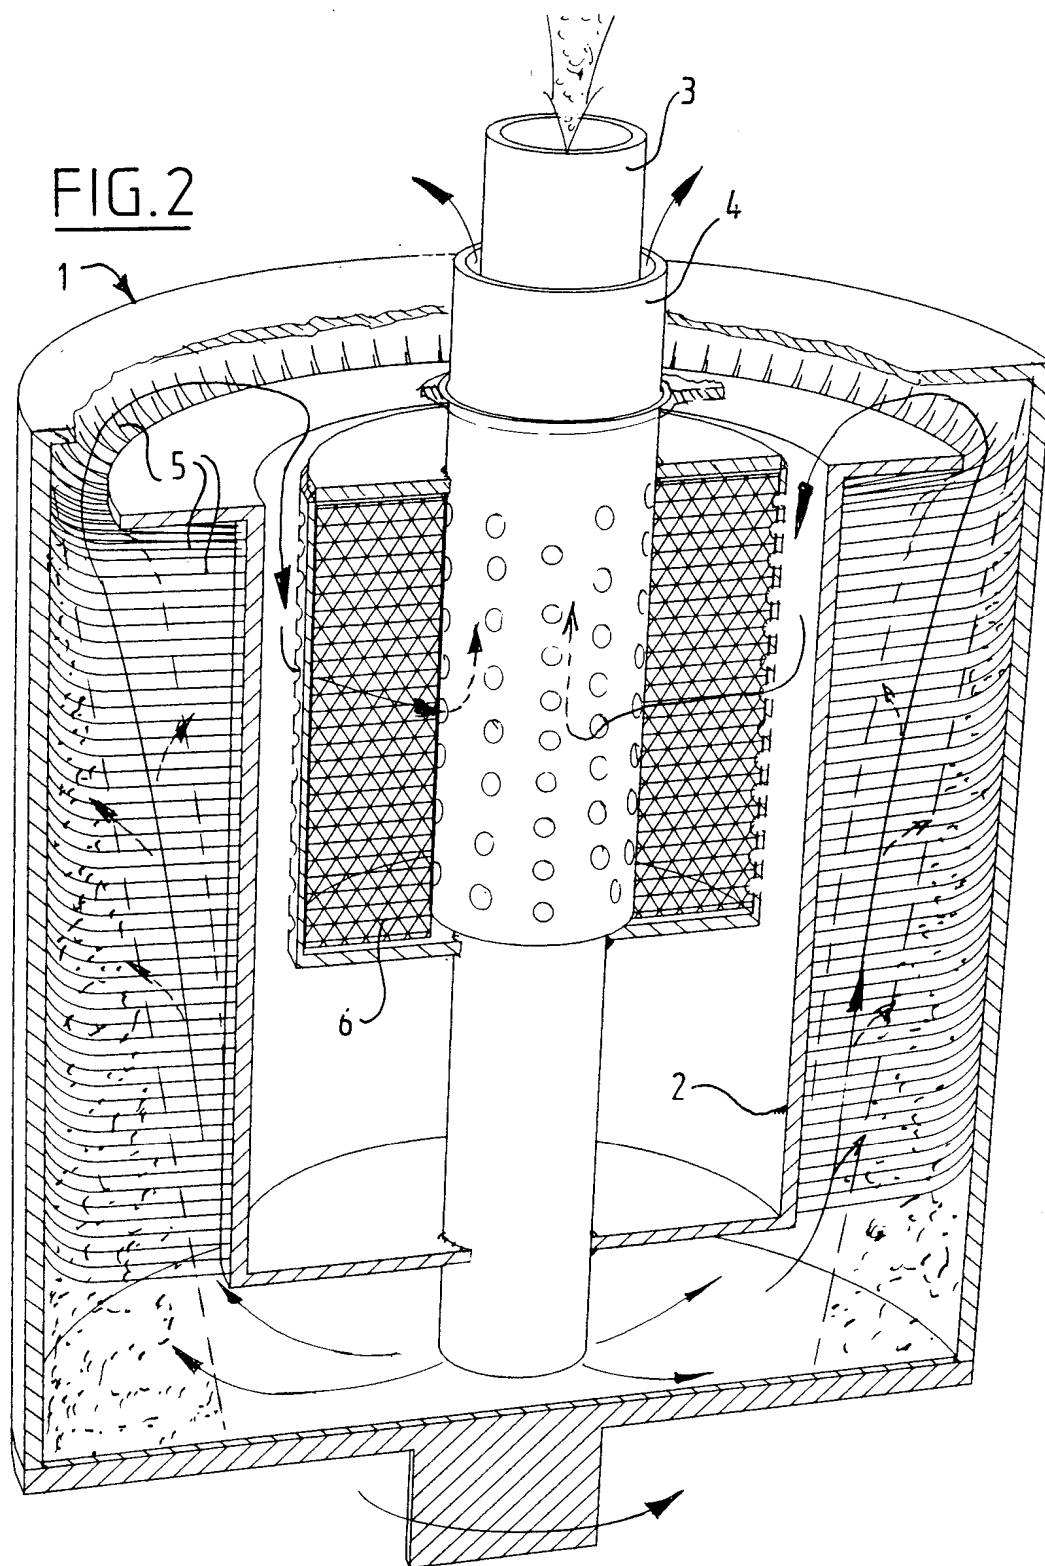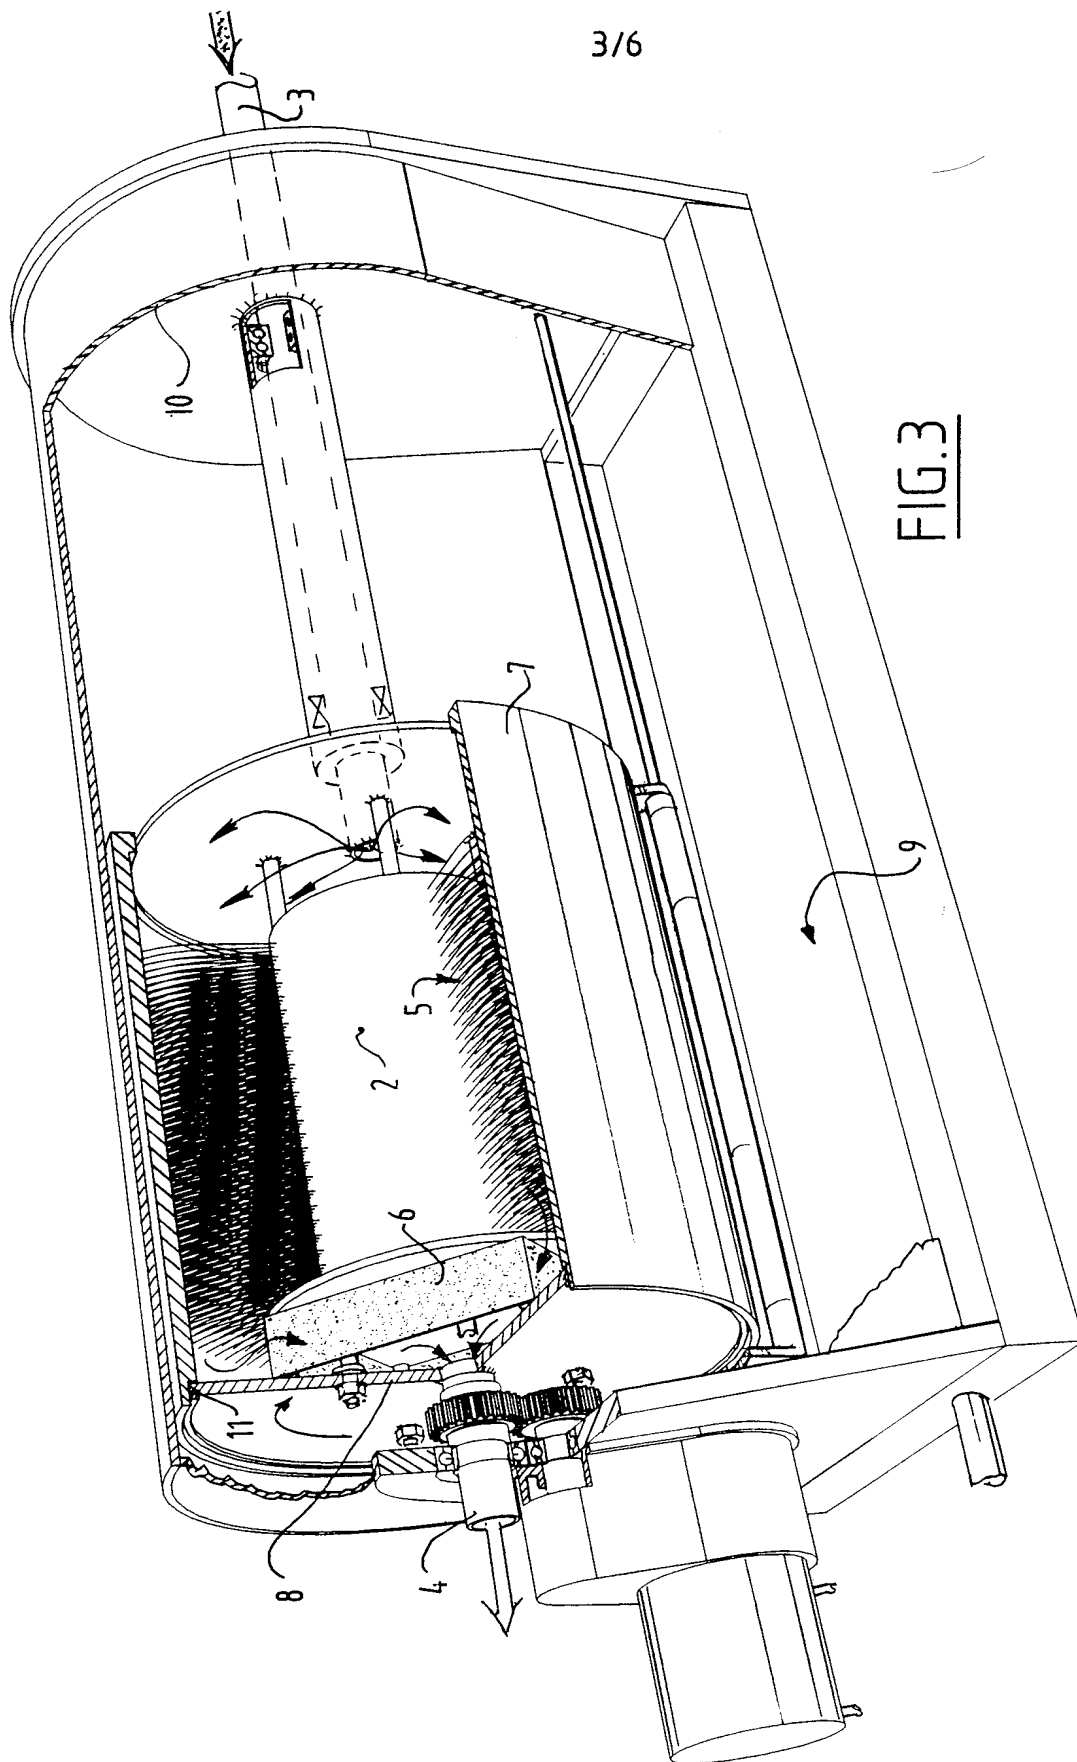

3/6

FIG. 3

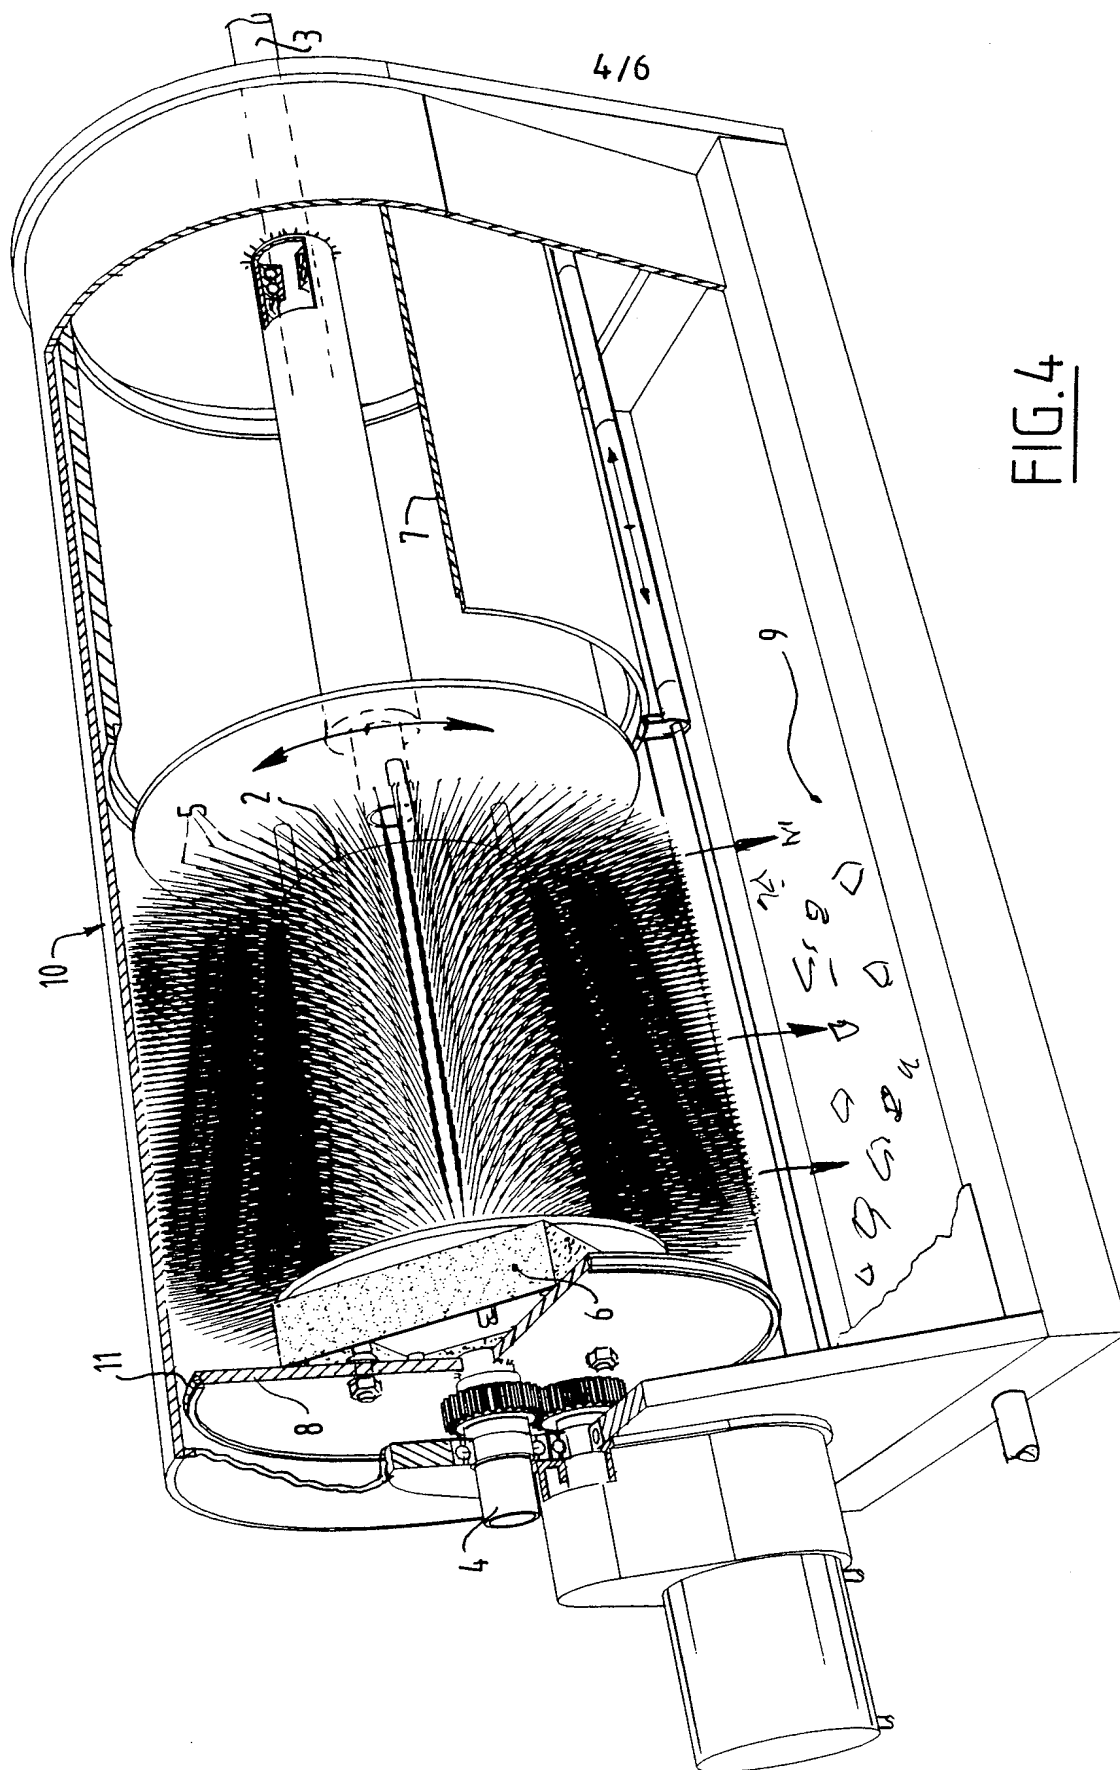
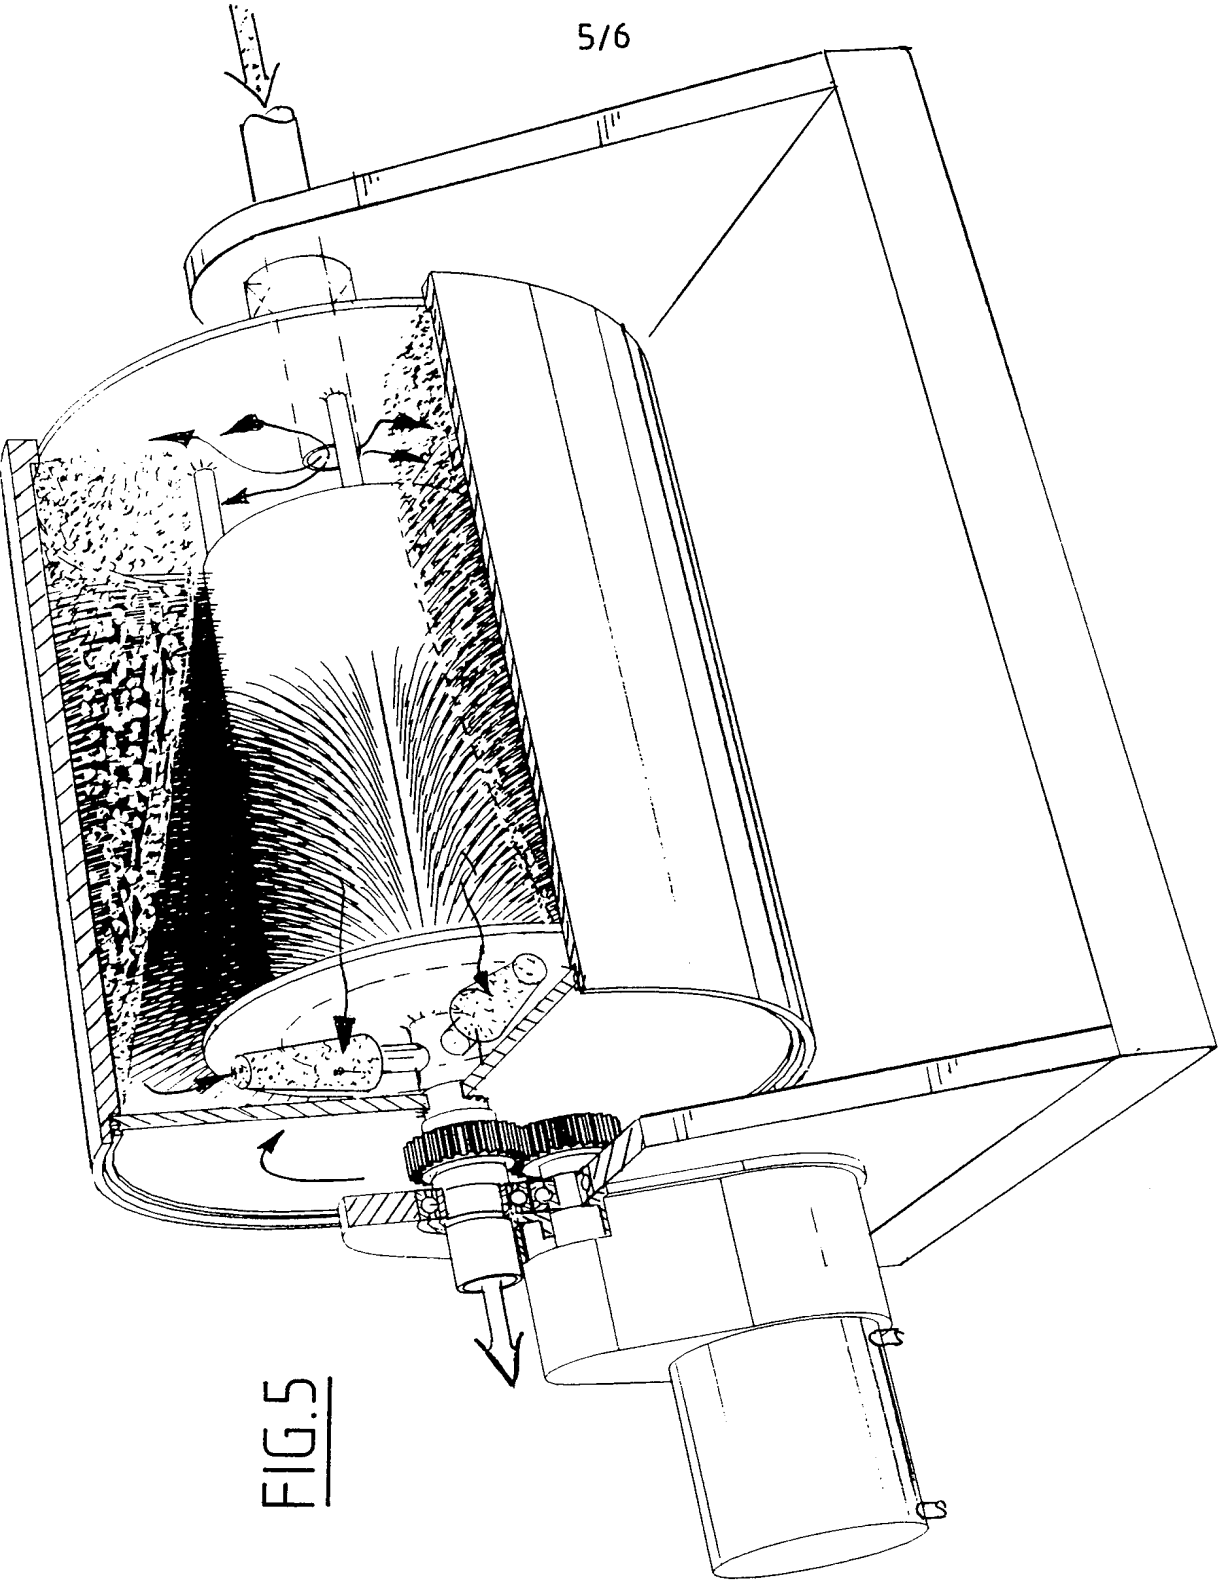


FIG. 4



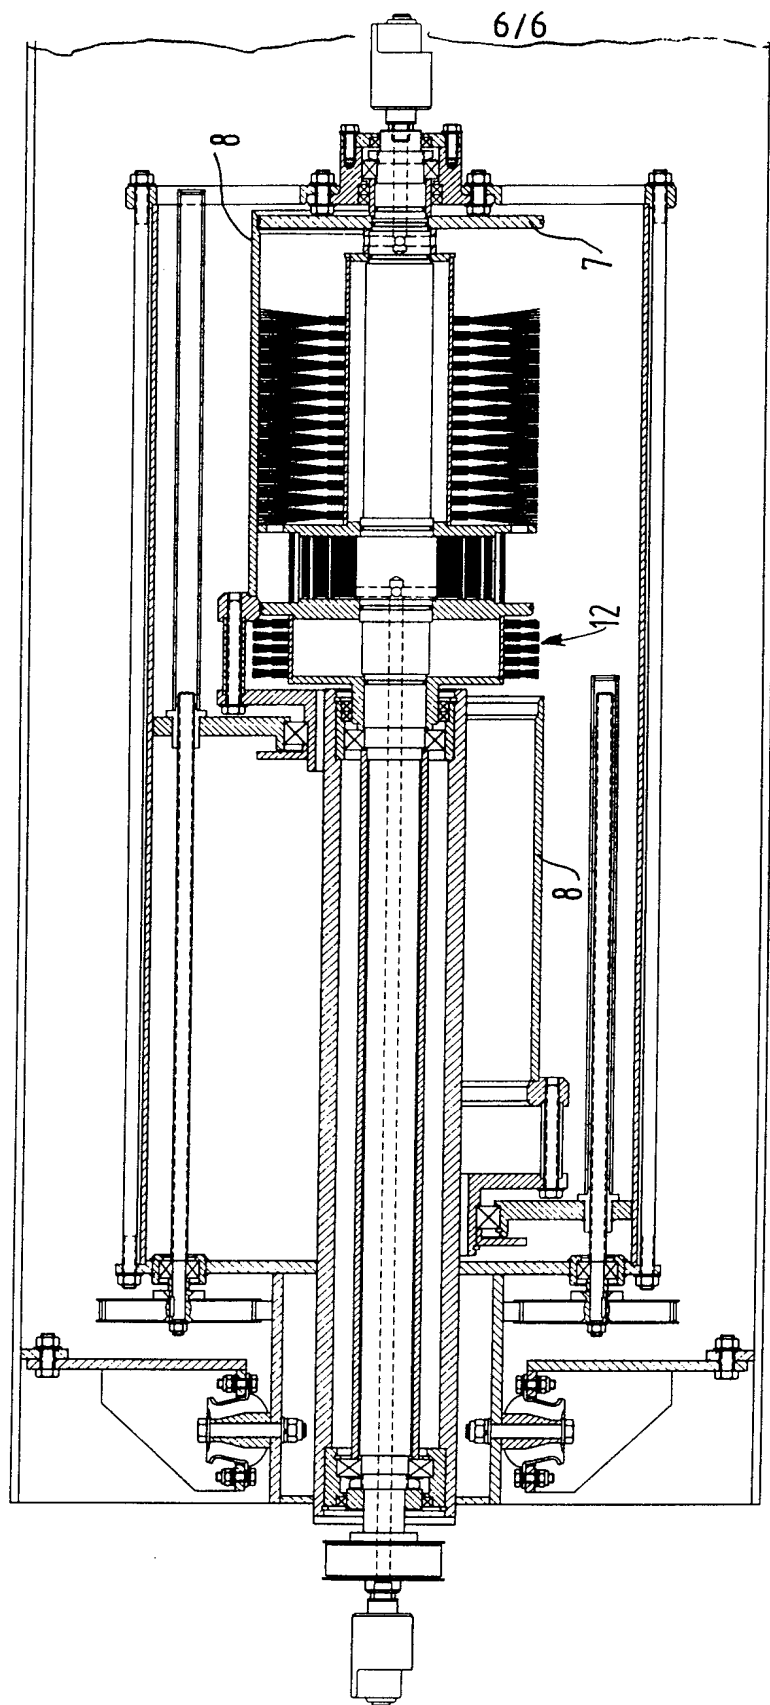


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 98/00679

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01D46/14 B01D45/14 B01D46/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| X | DE 297 16 708 U (BURKHARDT ARMIN) 27 November 1997 (1997-11-27) figure 2 | 1,6 |
| X | DD 216 169 A (HALLE MASCHF VEB) 5 December 1984 (1984-12-05) figure 2 | 1,2,6 |
| A | DE 11 44 999 B (OSPELT G.) figure 1 | 1 |
| A | EP 0 331 809 A (RUETGERSWERKE AG) 13 September 1989 (1989-09-13) figure 1 | 1 |
| A | GB 1 408 418 A (THORDARSON J) 1 October 1975 (1975-10-01) figure 1 | 1 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 August 1999

Date of mailing of the international search report

13/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Faria, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL 98/00679

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|---|--|
| DE 29716708 U | 27-11-1997 | NONE | |
| DD 216169 A | 05-12-1984 | NONE | |
| DE 1144999 B | | NONE | |
| EP 0331809 A | 13-09-1989 | DE 3807701 A DE 8816486 U | 21-09-1989 31-08-1989 |
| GB 1408418 A | 01-10-1975 | AT 354992 B AT 994772 A CH 564367 A DE 2257268 A FR 2165895 A IT 973667 B SE 391291 B | 11-02-1980 15-07-1979 31-07-1975 24-05-1973 10-08-1973 10-06-1974 14-02-1977 |